

SFP 1.25Gb/s 850nm 550m DDMI


RT-G01U85-C(I)00

<p>Product Features</p> <ul style="list-style-type: none"> • Up to 1.25Gbps Data Links • 850nm VCSEL laser transmitter and PIN/TIA receiver • Maximum link length of 550m on 50/125um MMF • Hot-pluggable SFP footprint • Duplex LC receptacles • Low power dissipation • RoHS compliant and lead-free • Support Digital Diagnostic Monitor interface • Single +3.3V power supply • Compliant with SFF-8472 • Case operating temperature Commercial:0°C to +70°C Industrial:-40°C to +85°C <p>Applications</p> <ul style="list-style-type: none"> • 1000BASE-SX Ethernet • 1.06Gb/s Fibre Channel <p>Compliance</p> <ul style="list-style-type: none"> • SFP MSA • SFF-8472 • IEEE802.3z • ROHS 	<p>Ordering Information</p> <table border="1"> <thead> <tr> <th>Part Number</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>RT-G01U85-C(I)00</td> <td>SFP 1.25Gb/s 850nm 550m DDMI</td> </tr> </tbody> </table> <p>For More Information: Wuhan RayOptekCo.,Ltd Address: G3-201,New Energy Building,No.999 Gao Xin Road, Wuhan, Hubei, China Phone:0086-27-87106345 Fax: 0086-27-87106345 Email: sales@rayoptek.com</p>	Part Number	Description	RT-G01U85-C(I)00	SFP 1.25Gb/s 850nm 550m DDMI
Part Number	Description				
RT-G01U85-C(I)00	SFP 1.25Gb/s 850nm 550m DDMI				

Ordering information

Part No.	Bit Rate (Gbps)	Laser (nm)	Distance (m)	Fiber Type	DDMI	Connector	Temp
ESGCLM85-S55C	1.25	850	550	MMF	YES	LC	0°C~70°C
ESGCLM85-S55I	1.25	850	550	MMF	YES	LC	-40°C~85°C

I. Pin Diagram

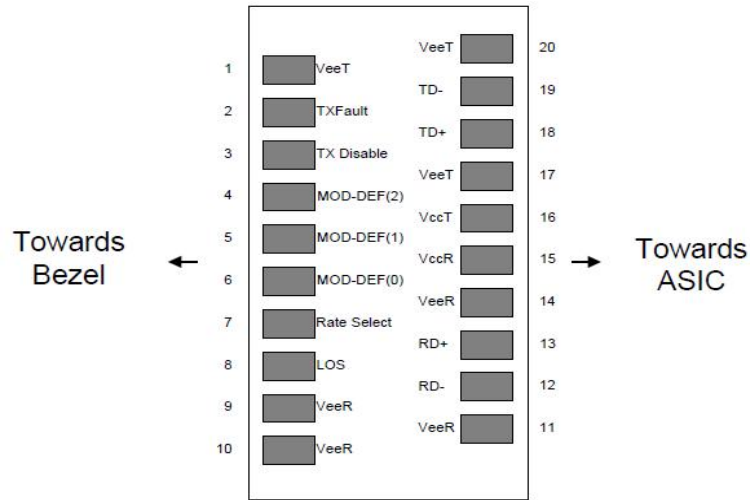

Pinout of Connector Block on Host Board

II. Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
2	T_{FAULT}	Transmitter Fault.	2
3	T_{DIS}	Transmitter Disable. Laser output disabled on high or open.	3
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	4
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	4
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	4
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic "0" indicates normal operation.	5
9	V_{EER}	Receiver Ground (Common with Transmitter Ground)	
10	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
11	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out (CML). AC Coupled	
13	RD+	Receiver Non-inverted DATA out (CML). AC Coupled	
14	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
15	V_{CCR}	Receiver Power Supply	
16	V_{CCT}	Transmitter Power Supply	
17	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1

18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V _{EET}	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T_{FAULT} is an open collector/drain output, which is pulled up with a 4.7kΩ – 10kΩ resistor on the host board, but is grounded inside the SFP cable plug.
3. Laser output disabled on T_{DIS} >2.0V or open, enabled on T_{DIS} <0.8V.
4. Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be VccT or VccR
 Mod-Def 0 is grounded by the module to indicate that the module is present
 Mod-Def 1 is the clock line of two wire serial interface for serial ID
 Mod-Def 2 is the data line of two wire serial interface for serial ID
5. LOS is open collector output. Should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V.
 Logic 0 indicates normal operation; logic 1 indicates loss of signal.

III. Absolute Maximum Ratings

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		3.6	V	
Storage Temperature	TS	-40		85	°C	
Case Operating Temperature	TOP	0		70	°C	Commercial
		-40		85		Industrial
Relative Humidity	RH	0		85	%	1

Notes:

1. Non-condensing.

IV. Optical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Transmitter						
Center Wavelength	λc	840	850	860	nm	
RMS Spectral Width	Pm			0.85	nm	
Average Output Power	Pavg	-9		-3	dBm	
Extinction Ratio	ER	9			dB	
Return Loss		12			dB	

Transmitter OFF Output Power	POff			-30	dBm	
Receiver						
Center Wavelength	λ_c	840		860	nm	
Receiver Sensitivity, Average Power				-17	dBm	
Receiver Saturation Power	Psat			0	dBm	
Loss of Signal Assert	P _A	-35			dBm	
Loss of Signal De-assert	P _D			-19	dBm	
LOS Hysteresis	P _D - P _A	0.5			dB	


V. Electrical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Supply Current	I _{CC}			300	mA	
Transmitter						
Input differential impedance	R _{in}		100			1
Differential data input swing	V _{in, pp}	200		1000	mV	
Transmit Disable Voltage	V _D	2		V _{CC}	V	
Transmit Enable Voltage	V _{EN}	V _{EE}		V _{EE} +0.8	V	
Receiver						
Differential data output swing	V _{out, pp}	200		1000	mV	2
LOS Fault	V _{LOS_fault}	2		V _{CC}	V	3
LOS Normal	V _{LOS_norm}	V _{EE}		V _{EE} +0.8	V	3
Power Supply Noise Tolerance	V _{CCT} /V _{CCR}	Per SFF-8431 Rev 4.1			mVpp	4

Notes:

1. Connected directly to TX data input pins.AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.


VI. Digital Diagnostic Memory Map

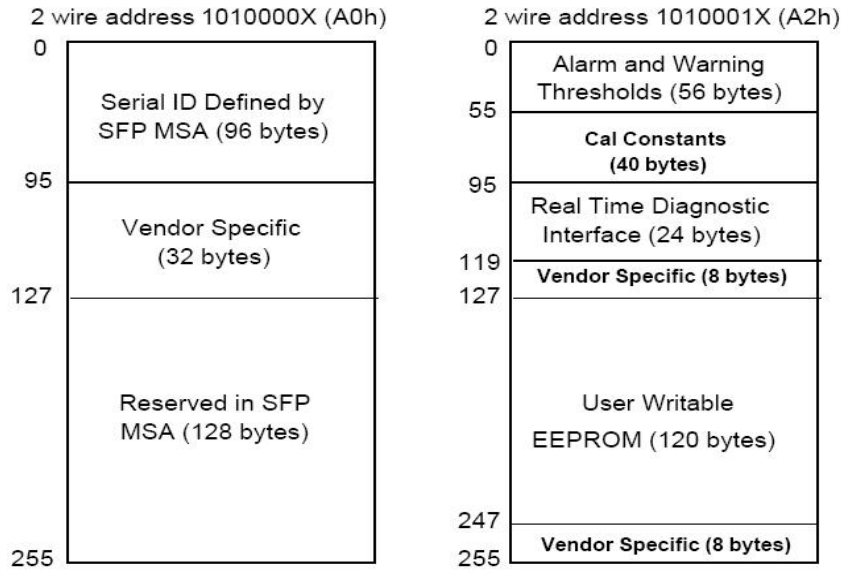


VII. Digital Diagnostic Monitoring Information

Parameter	Unit	Accuracy
Case Temperature	°C	±3
Supply Voltage	V	±3%
Tx Bias Current	mA	±10%
Tx Optical Power	dB	±3
Rx Optical Power	dB	±3

VIII. Recommended Interface Circuit

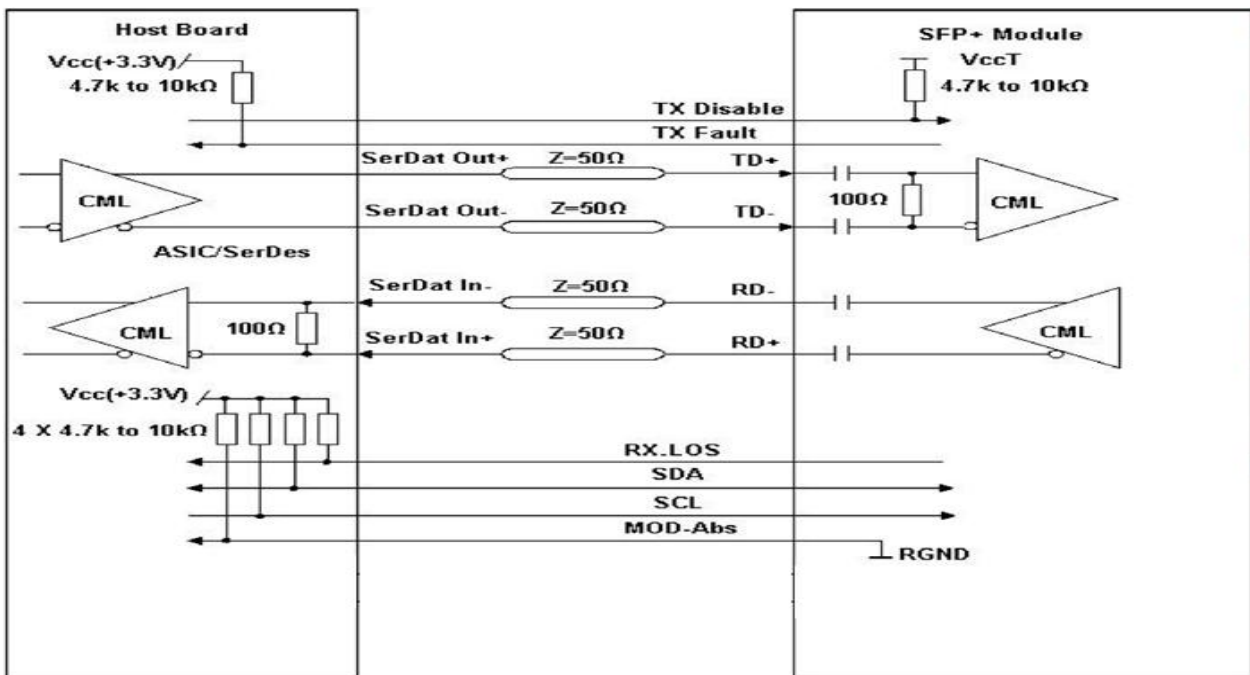

IX. Mechanical Dimensions

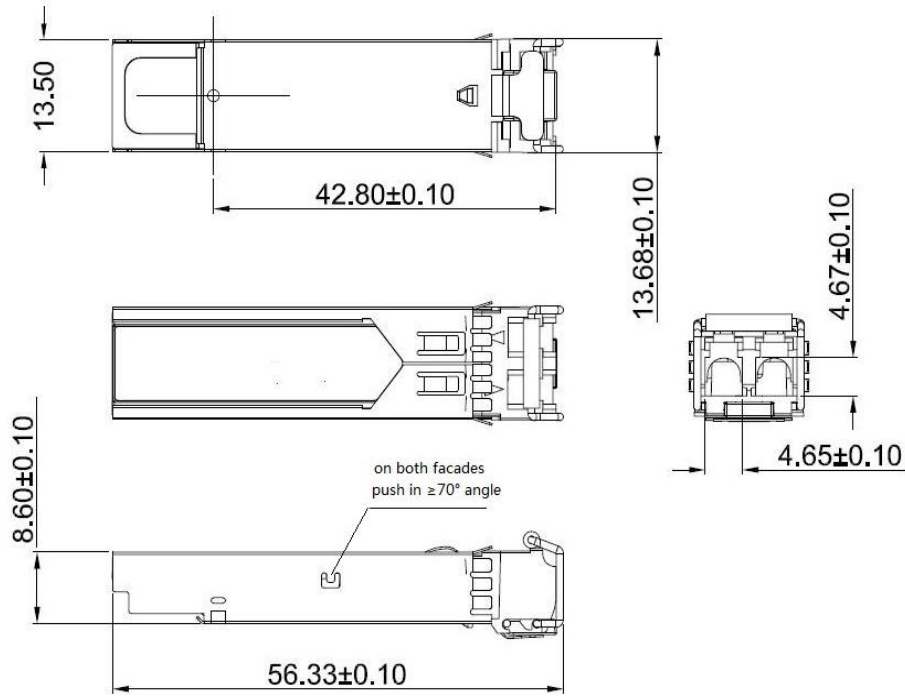

SFP wire mechanical drawing (Unit: mm)